



Sign Lights

LED
STREET
LIGHTS



LED
FLOOD
LIGHTS




LED
Highbay
LIGHTS



LED
INDOOR
LIGHTS



LED LINEAR
Highbay
LIGHTS



SOLAR/DC
LED
LIGHTS



INTEGRATED
SOLAR
STREET
LIGHTS



SOLAR
HOME
LIGHTING



ALL IN ONE
SOLAR STREET
LIGHTS



LED
FLAMEPROOF
LIGHTS



PRODUCTS



LED **STREET** LIGHTS
LED **FLOOD** LIGHTS
LED **HIGHBAY** LIGHTS
LED **FLAMEPROOF** LIGHTS
SOLAR **LED STREET** LIGHTS
SOLAR **LED FLOOD** LIGHTS
INTEGRATED **SOLAR STREET** LIGHTS
ALL IN ONE SOLAR STREET LIGHTS
LED **INDOOR** LIGHTS
SOLAR **MOVABLE LIGHTS TOWER**
BLDC FANS
SOLAR **CCTV CAMARA**
BUS LIGHTS
LED **LINEAR HIGHBAY** LIGHTS
GRID CONNECTED SOLAR STREET LIGHTS
SOLAR **ROOFTOP** SYSTEMS
SOLAR **WATER PUMPS**





Sign Lights



110/220V AC
LED
STREET LIGHTS



PRODUCT INFORMATION

HOUSING	Aluminium PDC
FRAME COLOUR	Black
IP RATING	IP66
OPERATING TEMP	(-40°C to 60°C)
INPUT VOLTAGE	90-305VAC, 50/60Hz
LIFESPAN	>50,000 hours (Ta-25°C)
ALUMINIUM GRADE	ADC12/LM24/ALSL132
POWER FACTOR	> 0.98
CCT	2700-6500K
CRI	>70
THD	< 10%
LUMINOUS EFFICACY	>120 lm/w
MECHANICAL IMPACT RESISTANCE	IK08 (Body & Frame Only)



APPLICATION



RoHS

LM79

LM80





Sign Lights



110/220V AC

LED STREET LIGHTS



PRODUCT INFORMATION

HOUSING	Aluminium PDC
FRAME COLOUR	Black
IP RATING	IP66
OPERATING TEMP	(-40°C to 60°C)
INPUT VOLTAGE	90-305VAC, 50/60Hz
LIFESPAN	>50,000 hours (Ta-25°C)
ALUMINIUM GRADE	ADC12/LM24/ALSL132
POWER FACTOR	> 0.98
CCT	2700-6500K
CRI	>70
THD	< 10%
LUMINOUS EFFICACY	>120 lm/w
MECHANICAL IMPACT RESISTANCE	IK08 (Body & Frame Only)



APPLICATION



LM79 LM80





Sign Lights

110/220/
24V AC

**LED
FLOOD LIGHTS**




110/220/
24V AC



PRODUCT INFORMATION

HOUSING	Aluminium PDC
FRAME COLOUR	Black
IP RATING	IP66
OPERATING TEMP	(-40°C to 60°C)
INPUT VOLTAGE	90-305VAC, 50/60Hz/24V AC
LIFESPAN	>50,000 hours (Ta-25°C)
ALUMINIUM GRADE	ADC12/LM24/ALSL132
POWER FACTOR	> 0.98
CCT	2700-6500K
CRI	>70
THD	< 10%
LUMINOUS EFFICACY	>120 lm/w
MECHANICAL IMPACT RESISTANCE	IK08 (Body & Frame Only)

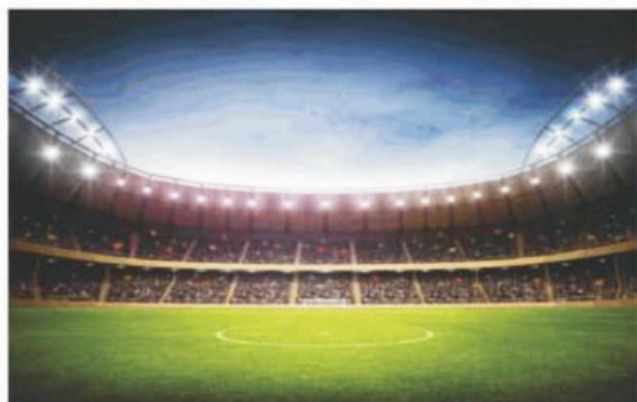

LM79 LM80

UL



ISO





Sign Lights

110/220V AC


LED

HIGHBAY LIGHTS



PRODUCT INFORMATION

HOUSING	Aluminium PDC
FRAME COLOUR	Black
IP RATING	IP66
OPERATING TEMP	(-40°C to 60°C)
INPUT VOLTAGE	90-305VAC, 50/60Hz
LIFESPAN	>50,000 hours (Ta-25°C)
ALUMINIUM GRADE	ADC12/LM24/ALSL132
POWER FACTOR	> 0.98
CCT	2700-6500K
CRI	>70
THD	< 10%
LUMINOUS EFFICACY	>120 lm/w
MECHANICAL IMPACTRESISTANCE	IK08 (Body & Frame Only)

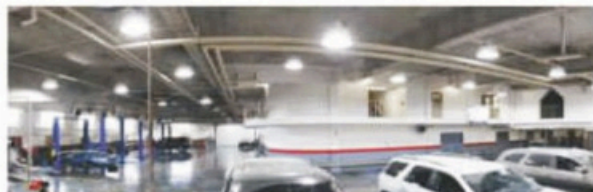




LM79 LM80





Sign Lights

LED DRIVERS

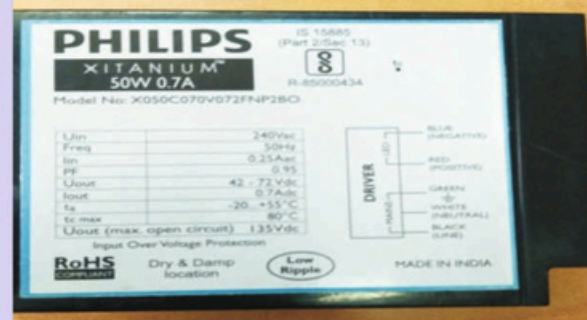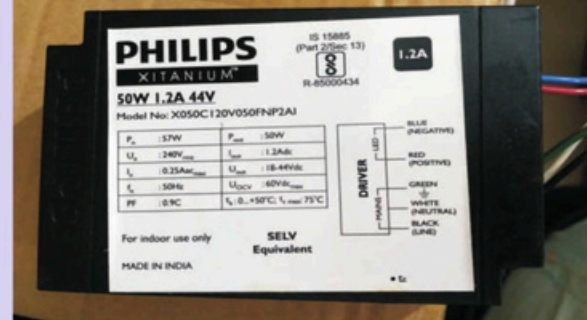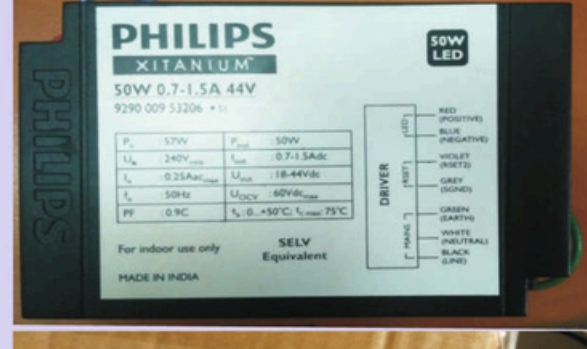



Sign Lights





Sign Lights

Head Office: 29/500/19A-1, Gali No.-11, Vishwas Nagar, Shahdara, Delhi-110032
Factory Office : G-133 Gazipur village Near CNG Petrol Pump Gazipur -110092
E-mail: signlightsjp@gmail.com | Mob.: +91-9971429493, +91-8178591251

